



TYRE SERVICE TOOLS

























5 2200226



1 Wheel Nut Cap / Cover Removal Tool

 Weight:
 Code No.

 15gms
 220047

Material: Special Plastic.

: It just slides over the cap. Snaps into position and when pulled, it extracts and retains the plastic cap in the tool. Fits all Peugeot Citroen models with removable nut cover.

2 Lug Nut Cap Puller

 Size:
 Weight:
 Code No.

 260mm long
 395gms
 220057

Material : Special Steel.

Finish : Electro Plating.

: A specialized tool to remove 32mm & 33mm Lug Nut Covers /

Caps from Truck wheels.

3 Chrome Lug Nut Cover Puller (Heavy Duty)

 Size:
 Weight:
 Code No.

 285mm long
 500gms
 220067

Material: Special Steel. Finish: Black colour.

Use : A specialized tool to remove 32mm & 33mm Lug Nut Covers /

Caps from Truck wheels.

4 Double Ended Wheel Wrench for Trucks

Length:	Size:	Weight:	Code No.
400mm	24 X 27	2.200kg	2224276
400mm	27 X 32	2.200kg	2227326
400mm	30 X 32	2.310kg	2230326
400mm	24 X 33	2.250kg	2224336
400mm	27 X 30	2.200kg	2227306
400mm	27 X 33	2.200kg	2227336
400mm	30 X 33	2.300kg	2230336
400mm	21 X 41	2.300kg	2221416

Material: Chrome Vanadium / Carbon Steel.

Finish : Bright Nickel Chrome Plating / Black Powder Coating.

Use : Loosening & tightening of Truck wheel nuts.

5 Tommy Bar

 Dia:
 Size:
 Weight:
 Code No.

 20mm
 500mm long
 1.250 kg
 2200226

Material: Forged Chrome Vanadium Steel.

Finish : Black colour.

Use: Truck wrench handle heat-treated for strength and durability.

Suitable for all Salry Truck Wrenches.

6 Four Way Wheel Nut Wrench for Trucks

 Length:
 Size:
 Weight:
 Code No.

 570mm
 24X27X32X3/4" square
 3.000kg
 2200014

Material: Forged Chrome Vanadium / Carbon Steel.

Finish: Bright Nickel Chrome Plating.

7 Four Way Wheel Nut Wrench for Passenger Cars

Length:	Size:	Weight:	Code No.
400mm	17X19X21X22	1.415kg	220025
400mm	17X19X22X1/2" square	1.420kg	220035
400mm	17X19X21X1/2" square	1.355kg	220045

Material: Forged Chrome Vanadium Steel / Carbon Steel with welded

centers to achieve the desired strength.

Finish : Bright Nickel Chrome Plating / Black Powder Coating.

Use : Loosening & tightening of Passenger Car wheel nuts.





8 Lever for Bicycles

Size: Weight: Code No. 110mm (4") 220714

25gms

Material: Nylon Plastic.

9 Tyre Lever

Size:	Weight:	Code No.
200mm (8")	240gms	222001
300mm (12")	385gms	223001
400mm (16")	630gms	224001
400mm (16")	375gms	220404

Material: Forged Chrome Vanadium Steel, hardened & tempered. Finish : Sand Blasted surface with Nickel Chrome Plating.

: Used for Motorcycle / Scooter tyre service.

10 Tyre Lever

Type:	Size:	Weight:	Code No.
With Boot	500mm (20")	800gms	220001
	500mm (20")	785gms	220002
	500mm (20")	815gms	220002S
Thin Cross Sectional	500mm (20")	640gms	225001
thickness of 7mm		-	
	500mm (20")	800gms	225101
Run Flat	500mm (20")	820ams	225201

Material: Forged Chrome Vanadium Steel, hardened & tempered. Finish : Sand Blasted surface with Nickel Chrome Plating.

: Used for Passenger Car tyre service. Use

11 Silk Lever

Use

Weight: Code No. Size: 500mm (20") 765gms 225301

Material: Forged Chrome Vanadium Steel, hardened & tempered.

Finish : Sand Blasted surface with Nickel Chrome Plating.

: Smooth, heavy duty & sturdy. One side is screwed with two strong protective Nylon 6 plastic inserts and one insert on other side of the lever.

No separate boot is required for shifting position to avoid direct contact between rim and lever.

Good for both steel and Aluminum rims.

12 Tyre Lever with screwed back protection.

Size: Weight: Code No. 225401 500mm (20") 800gms

Material: Forged Chrome Vanadium Steel, hardened & tempered.

Finish : Sand Blasted surface with Nickel Chrome Plating.


: Smooth, heavy duty & sturdy. One side is completely screwed with strong Nylon 6 plastic protection.

Good for both steel and Aluminum rims.

No separate boot is required for shifting position to avoid direct

contact between rim and lever.



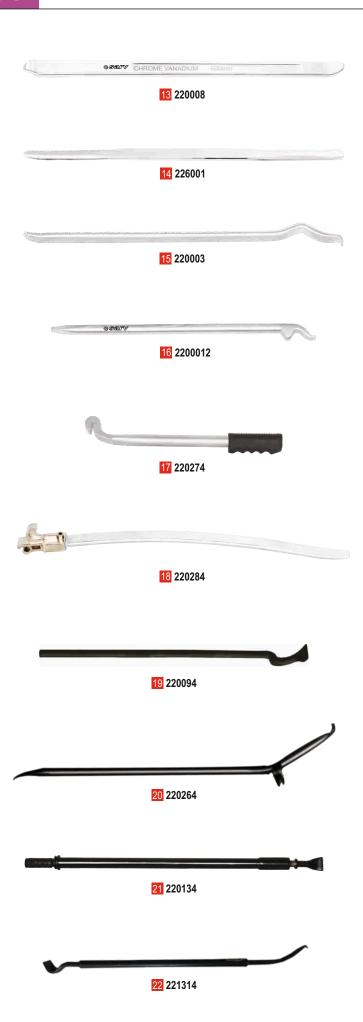

13 Tyre Lever

 Size:
 Weight:
 Code No.

 600mm (24")
 930gms
 220008

Material: Forged Chrome Vanadium Steel, hardened & tempered. **Finish**: Sand Blasted surface with Nickel Chrome Plating.

14 Run Flat Lever

 Size:
 Weight:
 Code No.

 600mm (24")
 865gms
 226001

Material: Forged Chrome Vanadium Steel, hardened & tempered.

Finish: Sand Blasted surface with Nickel Chrome Plating.

15 Truck Tyre Lever with Crank End

 Size:
 Weight:
 Code No.

 610mm (24")
 1.360kg
 220003

Material: Forged Chrome Vanadium Steel, hardened & tempered.

Finish: Sand Blasted surface with Nickel Chrome Plating.

Use : Suitable for LCV, Trucks and large wheels, this tyre lever is extra heavy duty with crank end.

16 Lever for Removal of Locking Rings

 Size:
 Weight:
 Code No.

 470mm (18")
 720gms
 2200012

Material: Forged Chrome Vanadium Steel, hardened & tempered.
 Finish: Sand Blasted surface with Nickel Chrome Plating.
 Use: To remove locking rings of tube type tyres.

17 Rim Straightener Lever

 Size:
 Weight:
 Code No.

 390mm (15")
 500gms
 220274

Material: Special Steel.

Finish : Sand Blasted surface with Nickel Chrome Plating.
Use : Used for repairing of deformation on the rim flange.

Suitable for Steel rims.

18 Tubeless Truck Tyre Lever with Hook

 Size:
 Weight:
 Code No.

 675mm (26.6")
 1.550kg
 220284

Material: Forged Chrome Vanadium Steel.

Finish : Sand Blasted surface with Nickel Chrome Plating.

Use: Used for mounting on wide base rims.

19 Swan Neck Leverage Bar

 Size:
 Weight:
 Code No.

 760mm long
 2.400kg
 220094

Material: Forged CV Steel, hardened & tempered. Black colour.

Use : Used to remove frozen or rusted beads from all types of Truck /

Farm / OTR rims.

20 Lever for Truck Lock Rings

 Size:
 Weight:
 Code No.

 900mm long
 1.900kg
 220264

Use: Used for multi-piece wheels especially hub type.

21 Impact Bead Breaker

 Size:
 Weight:
 Code No.

 1270mm-2030mm long
 10.500kg
 220134

Material: Steel Pipe. Black colour.

:Used to easily loosen beads of the tyre with bead-breaking foot and ram bar but never cuts the bead of the tyre.

22 Trilex Lever for Tubeless Truck/ Bus Tyre

 Size:
 Weight:
 Code No.

 1045mm long
 3.200kg
 221314

Material: CV Steel and Steel Pipe.

Use: A double mounting lever for 3 piece rims.





23 Wheel Flange Loosener

Dia: Weight: Code No. 300mm long 1.800kg 220204 32mm

Material: Forged CV Steel, hardened & tempered. Black colour.

: Used for loosening rusted Truck and Bus Beads. Speeds up Truck tyre repair work and saves labour and time.

24 Wheel Flange Loosener with Plastic Hand Protection

Dia: Colour: Size: Weight: Code No. 32mm Red 330mmx93mm 1.850kg 2202045 32mm Blue 330mmx93mm 1.850kg 2202045S

Material: Forged CV Steel, hardened & tempered.

Finish : Sand Blasted surface with Nickel Chrome Plating.

: Used to loosen rusted Truck and Bus Beads. Speeds up Truck

tyre repair work. Easy to handle.

Special Lever for Motorcycle Tyres with Stopper

Weight: Code No. 220154 390mm long 540gms

Material: Forged CV Steel, hardened & tempered. Black colour.

26 Lever for Tubeless Tyres for Passenger Cars

Size: Weight: Code No. 220164 390mm long 565gms

Material: Forged CV Steel, hardened & tempered. Black colour.

27 Lever for Tube and Tubeless Truck Tyres Mounted on Flat Rims

Size: Weight: Code No. 420mm long 810gms 220214

Material: Forged CV Steel, hardened & tempered. Black colour.

28 Lever for Tube and Tubeless Truck Tyres - mounted on Flat Rims

Weight: Code No. 1.050kg 220194 460mm long

Material: Forged CV Steel, hardened & tempered. Black colour.

Lever for small size Tubeless Truck & Tractor Tyres - mounted on

Drop-Centre Rims Size: Weight: Code No.

530mm long 1.050kg 220174

Material: Forged CV Steel, hardened & tempered. Black colour.

Lever for big size Tubeless Truck & Tractor Tyres - mounted on

Drop-Centre Rims Size: Weight: Code No. 760mm long 1.630kg 220184

Material: Forged CV Steel, hardened & tempered. Black colour.

Lever for Tubeless Truck Tyre - mounted on 15° drop-centre rims

Size: Weight: Code No. 800mm long 1.950kg 220004

Material: Forged CV Steel, hardened & tempered. Black colour.

32 Lever for Lug Base and Earthmover Tyres - mounted on Drop-Centre Rims

Weight: Code No. 940mm long 2.180kg 220244

Material: Forged CV Steel, hardened & tempered. Black colour.

33 Lever for Earthmover Tyres

Size: Code No. Weight: 965mm long 2.780kg 220234

Material: Forged CV Steel, hardened & tempered. Black colour.

34 Lever for Truck, Tractor / OTR Tyres

Code No. Weight: 1400mm long 11.300kg 220224

Material: Forged CV Steel, hardened & tempered. Black colour.





Professional Tyre & Garage Tools since 1987 35 Demounting Lever for Tubeless Truck/ Bus Tyre Size: Code No. 220314 1780mm long 6.500kg Material: Casting and Steel Pipe. 36 Mounting Lever for Tubeless Truck/ Bus Tyre Weight: Code No. 2.600kg 220414 1050mm long Material: Casting and Steel Pipe. Mounting Lever for Tubeless Truck/ Bus Tyre Size: Weight: Code No. 1040mm long 220514 2.950kg Material: Casting and Steel Pipe. Black Powder Coating. : This mounting lever is ideal for Aluminum rims. 38 Demounting Lever for Tubeless Truck/ Bus Tyre Size: Weight: Code No. 1610mm long 10.100kg 220614 Material: Casting and Steel Pipe. Black Powder Coating. : This demounting lever is ideal for Aluminum rims. Demounting Lever for 17.5" Tubeless Truck/ Bus Tyre Size: Weight: Code No. 1500mm long 6.500kg 221414 Material: Special Steel Casting. Powder Coating. : Specialized lever for demounting 17.5" Truck / Bus tyre. 40 Heavy Duty Mounting Lever for Tubeless Truck/Bus Tyre Size: Weight: Code No. 220814 1210mm long 3.400kg Use : Used for a variety of tyre changing applications. 41 Rim Lock Ring Removal Tool Weight: Code No.

1050mm long 3.500kg 220914

Material: Casting and Steel Pipe. Powder Coating.

: Specialized wrench to remove single lock rings of Truck / Bus tyre rims after bead breaking.

42 Rim Lock Ring Fitting Tool

Size: Weight: Code No. 1230mm long 221014 2.950kg

Material: Forged CV Steel, hardened & tempered.

Use : Specialized wrench to fit rings of Truck / Bus tyre rims. Used in pair.

Wheel Cover Puller/Replacer

Size: Weight: Code No. 350mm long 610gms 220011 452mm long 820gms 220211

Material: Steel Rod.

: Removes wheel covers quickly and easily without damaging or scratching them. Rubber head prevents damage to the hub cap and is replaceable.

Rubber Mallet

Size: Weight: Code No. 420mm long 480gms 220420 300mm long 1.200kg 220430

: Rubber Head Mallet prevents damage to the rim surface.

Pump Ring Rigid for Tubeless Truck Tyre

Size: Weight: Code No. 22.5" 11.000kg 224222

Rubber Ring for Pump Ring Rigid

Weight: Code No. 3.500kg 224222R

18

46 Pump Ring Flexible for LCV and HCV Tubeless Tyre

Sectional Dia: Weight: Code No. 25mm 15.5" 500gms 224215 224217 25mm 17.5' 750gms 25mm 22.5" to 24.5" 1.000kg 224224 Use : Used for sealing the tyre beads of the rims.





Tyre Tread Depth Ga	uge (Plastic)		
	Size: 0 - 30mm 0 - 30mm	Weight: 10gms 30gms	Code No. 2201017 2200117
Tyre Tread Depth Ga	uge (Stainless Steel)		
For Passenger Car tyre For Truck tyre		Weight: 30gms 85gms	Code No. 2200217 2200517

 49 OTR Tread Depth Gauge (Aluminum)

 Size:
 Weight:
 Code No.

 0 -150mm /
 170gms
 2200317

0-192 (32 NDS)

 For measurement of Earthmover tyre tread depth. Supplied with case. Easy readability due to Glass lens.

50 OTR Tread Depth Gauge (Acrylic Plastic)

 Size:
 Weight:
 Code No.

 0-160mm /
 55gms
 2200417

 0-192 (32 NDS)
 32 NDS)

Use : For measurement of Earthmover tyre tread depth. Supplied with case.

51 Dial Type Tread Depth Gauge

 Size:
 Weight:
 Code No.

 0-110mm
 80gms
 2200717

52 Tool to Cancel Tyre Tread

Weight: Code No. 110gms 550005

Material: Blades are made from Special Steel.

53 WHEEL PROTECT Loose Wheel Nut Indicator

Size:	Code No.	Size:	weight:	Code No.
17mm	224417	30mm	2gms	224430
19mm	224419	32mm	2gms	224432
21mm	224421	33mm	2gms	224433
24mm	224424	36mm	2gms	224436
26mm	224426	38mm	2gms	224438
27mm	224427	40mm	2gms	224440
		41mm	2gms	224441

Material: Special Durable Plastic.

Colour : Fluorescent Yellow, Red, Pink, Green, Orange.Note : Customized colour can be provided for large orders.

54 Dust Cap & Loose Wheel Nut Indicator

Type:	Size:	Weight:	Code No.
Upper arrow	32mm	17gms	224232
Upper arrow	33mm	17gms	224233
Bottom arrow	32mm	17gms	224332
Bottom arrow	33mm	17gms	224333

Material: Special Durable Plastic.
Colour: Green, Red, Yellow, Pink.

Note : Customized colour can be provided for large orders.

55 CHROME PROTECT Dust Cap Loose Wheel Nut Indicator (Fitted with Soft plastic insert)

Type:	Size:	Weight:	Code No.
Upper arrow	19mm	20gms	224219CH
Upper arrow	21mm	20gms	224221CH
Upper arrow	32mm	60gms	224232CH
Upper arrow	33mm	60gms	224233CH
Bottom arrow	32mm	45gms	224332CH
Bottom arrow	33mm	45gms	224333CH

Material: Made from heavy duty & high quality special durable plastic.

Finish : Chrome Plated.

: Soft plastic insert fitted inside provides better grip with lug nut and makes them easy to put on and take off. Prolongs the service life of studs & nuts through protection from corrosion, weathering & damage. Complements the look of vehicles with

chrome wheels.





56 220303 Rim Lock Ring Fitting/ Removal Tool Kit (For Tube-Type Tyres)

56 Rim Lock Ring Fitting/ Removal Tool Kit (For Tube-Type Tyres)

	(With Bag)	weight: 12.870kg 17.470kg	220303 220303B
The Kit contains the follow	ing items:		
Tool:	Qty:	Weight:	Code No.
Bag with Wheels (optional)	1 No.	4.600kg	220302
 Ring Removal Tool 	1 No.	3.500kg	220914
 Ring Fitting Tool 	2 No.	2.950kg	221014
 Tyre Lever 600mm 	1 No.	930gms	220008
 Tyre Lever with Crank End 	1 No.	1.360kg	220003
Valve Core Screw Driver	1 No	25ams	330002

Use : Mounting/demounting tube-type tyres (single and double lock ring) in less than 2 mins. Complete demo on "Sarv" Youtube channel.





Weight: Code No. 17.930kg 220403 (With Bag) 22.530kg 220403B The Kit contains the following items: Weight: Code No. Bag with Wheels (optional) 4.600kg 220302 1 No. 1.950kg Tyre Lever 2 No. 220004

57 Tubeless Tyre Mount/Demount Standard Tool Kit

58 Tubeless Tyre Mount/Demount Regular Tool Kit

 Tyre Lever 1 No. 1.630kg 220184 10.500kg Impact Bead Breaker 1 No. 220134 Bead Holding Tool 1 No. 350gms 220400 Valve Core Screw Driver 1 No. 25gms 330002 Sarv Paste (Economy) 1 No. 1.000kg 2200130 Brush for Truck Tyre 1 No. 150gms 220415 Duster 1 No. 15gms D0015

: Mounts / Demounts all types of tubeless tyres 17.5" to 24.5". Use





Weight: Code No. 21.560kg 220503 The Kit contains the following items: Tool: Weight: Code No. Qty: 2.600kg 220414 Mounting lever 1 No. 6.500kg Demounting Lever 1 No. 220314 Impact Bead Breaker 1 No. 10.500kg 220134 Bead Holding Tool 770gms 1 No. 220500 Valve Core Screw Driver 1 No. 25gms 330002 1.000kg Sarv Paste (Economy) 1 No. 2200130 Brush for Truck Tyre 1 No. 150gms 220415 Duster 1 No.

Use : Mounts all type of tubeless tyres 20" to 24.5". Demounts tyre in 8 seconds and remounts in 20 seconds. Works on standard and super single duplex tyres.

15gms



D0015





59 Tubeless Tyre Mount/Demount Regular Tool Kit Weight: Code No. 221503 9.870kg The Kit contains the following items: Tool: Weight: Code No. Qty: 220414 2.600kg Mounting Lever 1 No. Demounting Lever 1 No. 6.500kg 220314 Bead Holding Tool 1 No. 770gms 220500



60 Tubeless Tyre Mount/Demount Smart Tool Kit

	(With Bag)	30.470kg	220603B
The Kit contains the follow	ing items:		
Tool:	Qty:	Weight:	Code No.
Bag with Wheels (optional)	1 No.	4.600kg	220412
 Mounting Lever 	1 No.	2.950kg	220514
 Demounting Lever 	1 No.	10.100kg	220614
 Impact Bead Breaker 	1 No.	10.500kg	220134
 Bead Holding Tool 	1 No.	770gms	220500
 Valve Core Screw Driver 	1 No.	25gms	330002
 Sarv Paste (Economy) 	1 No.	1.000kg	2200130
 Brush for Truck Tyre 	1 No.	150gms	220415
Duster	1 No.	15gms	D0015

Weight:

25.870kg

Code No. 220603

Use : Mounts all type of tubeless tyres 20" to 24.5". Demounts tyre in 8 seconds and remounts in 20 seconds.





61 Tubeless Tyre Mount/Demount Tool Kit for 17.5" Tyre

(With Bag)	Weight: 22.200kg 26.600kg	Code N 220905 220905	,
(With Bag)	26.600kg	22090)5

The Kit contains the following items:

Tool:	Qty:	Weight:	Code No.
Bag with Wheels (optional)	1 No.	4.600kg	220412
 Mounting Lever 	1 No.	3.400kg	220814
 Demounting Lever 	1 No.	6.500kg	221414
 Impact Bead Breaker 	1 No.	10.500kg	220134
 Bead Holding Tool 	1 No.	250gms	220513
 Valve Core Screw Driver 	1 No.	25gms	330002
Sarv Paste (Economy)	1 No.	1.000kg	2200130
 Brush for Truck Tyre 	1 No.	150gms	220415
Duster	1 No.	15gms	D0015

Use : Specifically designed to mount/demount 17.5" tyres without damaging the tyre bead and rim.



MANUFACTURING AND EXPORTS TO 70+ COUNTRIES SINCE 1987



WORLDWIDE PRESENCE







or Subscribe to our YouTube Channel Sarveshwari Enginee



Sarveshwari Engineers

355 Deepali, Pitampura, Delhi - 110 034 (INDIA) Tel.: 91-11-2702 3750, 91-11-2702 1499

Web: www.sarveshwari.com E-mail: info@sarveshwari.com





